

FIFTY-ROPEFERRY ROAD



WATERFORD, CT 06385-2886

**ADDENDUM #1
Notice to Bidders
Bid#23-135 Library Fuel Tank Replacement**

October 10, 2023


The purpose of this addendum is to provide information to Bidders.

Bidders are advised as follows:

1. ***Drawing 2, Detail 1, Tank Partial Plan:***
 - o Provide 3" schedule 40 steel remote fill pipe. Prime and paint with rust inhibited enamel.

2. ***Drawing 3, Detail 1, Tank Plan:***
 - o Delete factory applied "Thorocoat Fine" tank coating from scope. Standard tank finish is acceptable.
 - o Provide overfill prevention valve equal to OPW 61fSTOP in 6" fill tapping on tank.

Feel free to contact me should you require any additional information.




Shea Davy
Purchasing Agent
Town of Waterford

SITE PLAN SHOWN IS BASED UPON ORIGINAL CONSTRUCTION DRAWINGS PREPARED BY GIBBONS, HEIDMANN & SALVADOR DATED MAY 2, 1975. ELEVATIONS, INVERTS, CONTOURS AND UTILITIES INDICATED ARE DERIVED FROM THESE DRAWINGS. RZ DESIGN ASSOCIATES DOES NOT GUARANTEE THE VALIDITY AND ACCURACY OF THE INFORMATION PROVIDED ON THIS SITE PLAN. CONTRACTOR SHALL VERIFY THIS INFORMATION IN THE FIELD AND SHALL REPORT ANY DISCREPANCIES TO ENGINEER.

LINETYPE LEGEND	
LINETYPE	DESCRIPTION
—FOS—	FUEL OIL SUPPLY PIPE
—FOR—	FUEL OIL RETURN PIPE
—V—	TANK VENT PIPE
—G—	TANK GAUGE CONDUIT
—L—	TANK LEAK DETECTION CONDUIT
—ALM—	HIGH LEVEL ALARM CONDUIT
—E—	ELECTRICAL CONDUIT
—TELE—	TELECOMMUNICATIONS CONDUIT
—CATV—	CABLE TELEVISION CONDUIT
—W—	DOMESTIC WATER PIPE
—F—	FIRE WATER PIPE
—S—	SANITARY SEWER PIPE
—ST—	STORM SEWER PIPE

1. "CALL BEFORE YOU DIG" SHALL BE CONTACTED PRIOR TO INITIATION OF THIS PROJECT.
2. CONTRACTOR SHALL PROVIDE REQUIRED NOTIFICATIONS TO CT DEEP AND LOCAL FIRE MARSHAL PRIOR TO REMOVAL OF EXISTING TANK.
3. CONTRACTOR SHALL TAKE ALL NECESSARY MEANS TO INSURE THAT THE FOUNDATION OF THE ADJACENT BUILDING WILL NOT BE UNDERMINED AND TO PROTECT EXISTING UNDERGROUND UTILITIES FROM DAMAGE. PROVIDE SHORING AND BRACING OF EXCAVATION AS REQUIRED.
4. CONTRACTOR SHALL PROVIDE TEMPORARY 1,000 GALLON DIKE TANK AND PIPING TO SUPPORT THE BUILDING HEATING SYSTEMS DURING CONSTRUCTION.
5. CONTRACTOR SHALL TRANSFER FUEL REMAINING IN EXISTING TANK (DOWN TO 12" ABOVE TANK BOTTOM) TO TEMPORARY TANK. CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF REMAINING 12" OF RESIDUAL FUEL, WASTE OIL, SLUDGE AND WATER AND ANY CLEANING FLUIDS EITHER INTRODUCED OR CONTAINED IN EXISTING TANK.
6. CONTACT CT DEEP, OWNER AND ENGINEER IF CONTAMINATED SOIL IS ENCOUNTERED DURING EXCAVATION.
7. RESTORE ALL DISTURBED AREAS TO EXISTING GRADE, UNLESS OTHERWISE NOTED.
8. AS PART OF THE BASE BID, CONTRACTOR SHALL COLLECT AND ANALYZE SOIL AND/OR WATER SAMPLES NECESSARY FOR TANK CLOSURE. SAMPLES SHALL BE SENT TO AN INDEPENDENT CERTIFIED LABORATORY BY THE CONTRACTOR. SUBMIT SAMPLE RESULTS AND CLOSURE REPORT TO OWNER.
9. CONTRACTOR SHALL PROVIDE OFF-SITE DISPOSAL OF ALL MATERIALS THAT ARE REMOVED AS A RESULT OF THIS PROJECT.

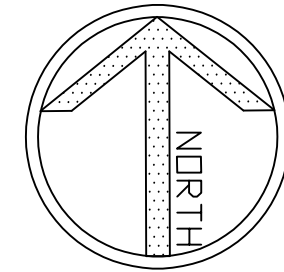

RZ Design Associates, Inc.
**MECHANICAL, ELECTRICAL,
AND STRUCTURAL ENGINEERING**
750 OLD MAIN STREET
SUITE 202
ROCKY HILL, CT 06067
P: (860) 436-4336
F: (860) 436-4450
www.rzdesignassociates.com

CONSULTANTS

JOB INFO	
----------	--

**PUBLIC
LIBRARY
FUEL TANK
REPLACEMENT**

**49 Rope Ferry Road
Waterford, CT 06385**

DWG DATA


PROJECT NUMBER:	23-029
SUBMISSION DATE:	08/23/23
DRAWN:	AC
REVIEWED:	KH
SCALE:	AS NOTED

DWG TITLE

TANK DEMOLITION PARTIAL PLAN

DWG #	
-------	--

1

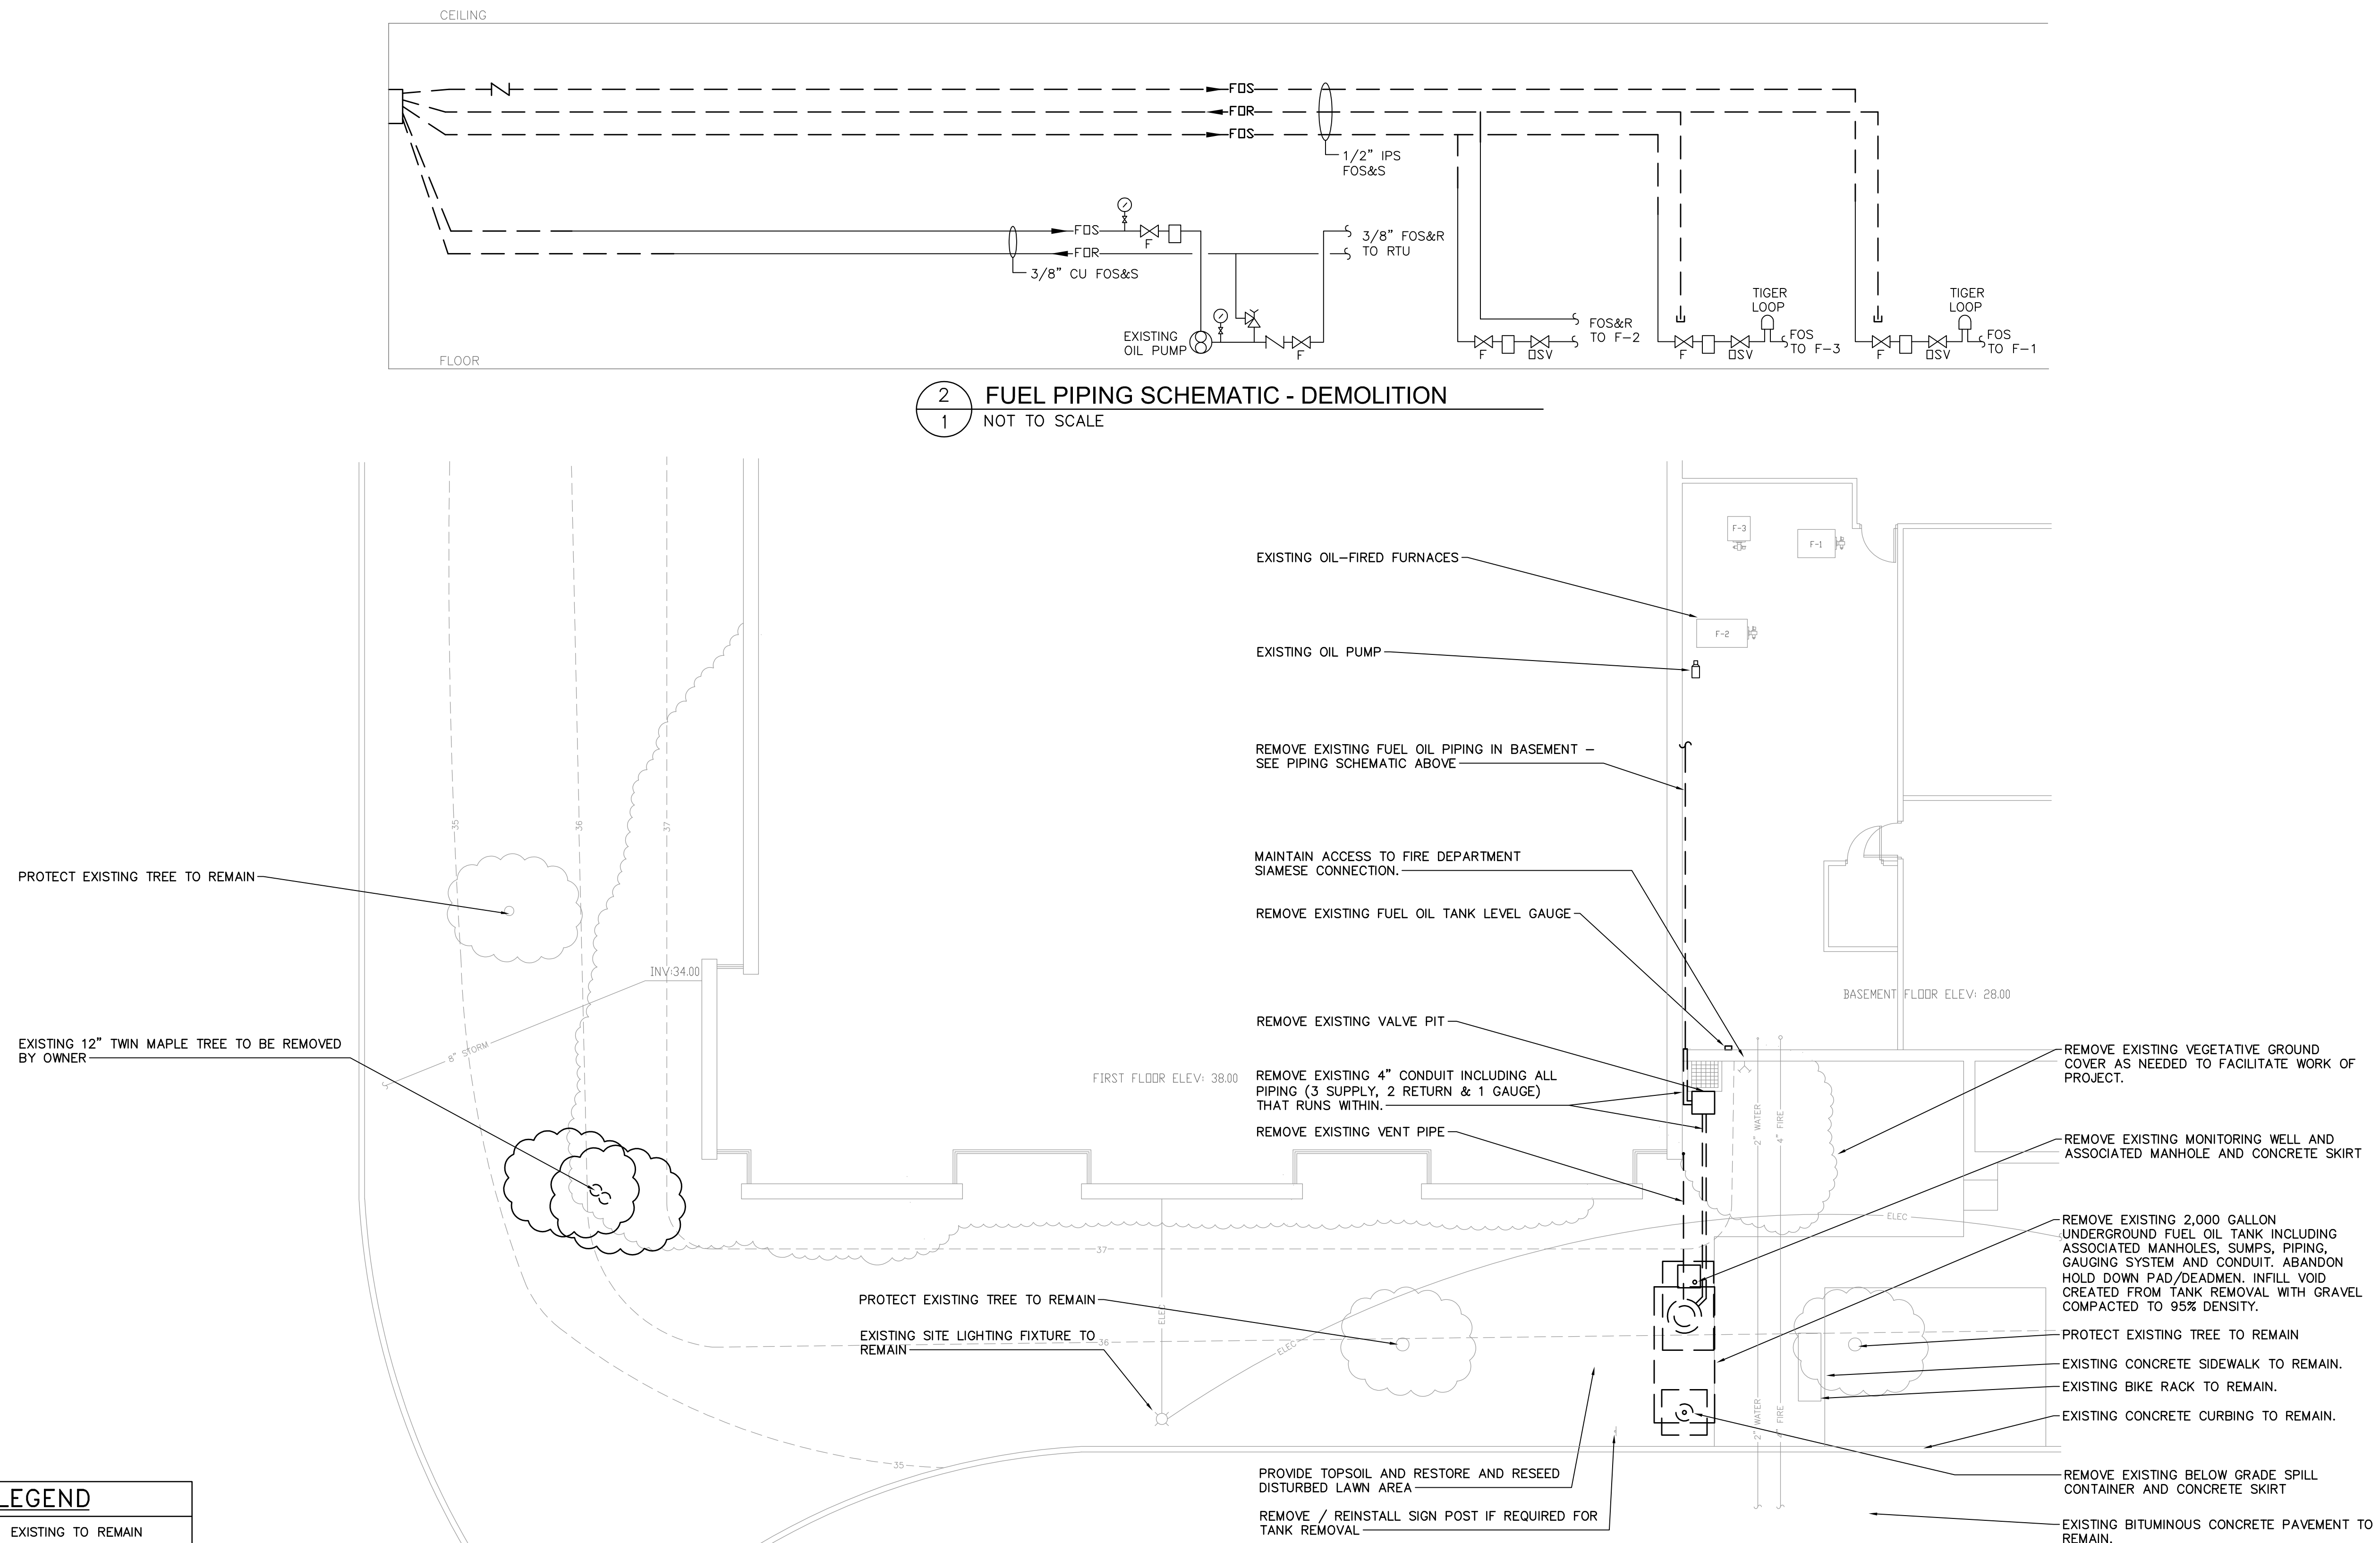

— EXISTING TO REMAIN
- - - EXISTING TO BE REMOVED

UNDERGROUND HEATING OIL TANK DEMOLITION PARTIAL PLAN

SCALE: 1/8"=1'-0"

